

SB-3714

1x4 Composite Video · Audio Distribution Amplifier

Input : 1x Composite Video, Stereo Audio (AR/AL)
 Output : 4x Composite Video, Stereo Audio (AR/AL)


VIDEO | AMPLIFIER



INTRODUCTION

SB-3714 is a 1 input to 4 outputs AV Distribution Amplifier. The Video Bandwidth 80MHz Distribution Amplifier product. It's one of the most innovative Composite Video and Stereo Audio(AR/AL) via RCA connector Distribution Amplifier product on the market today. It has 1 individual input with 4 individual outputs. Because it is a 1 to 4 signal Distribution Amplifier, one (1) input may be routed to four (4) outputs. It completely eliminates the need to constantly move around Composite Video and Stereo Audio input and output cables. This Distribution Amplifier is ideally suited for TV for the resolution of 480p, 720p.

DIAGRAM TYPICAL

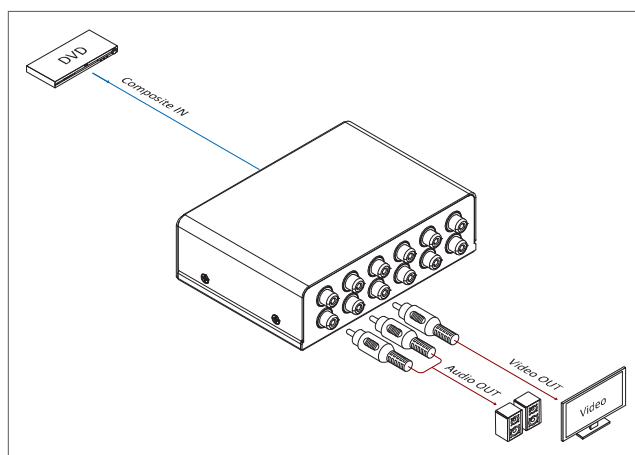

07

FEATURES

01. Support 1x4 Composite Video/Stereo Audio Distribution Amplifier
02. Signals amplifier including: Composite Video and Stereo Audio (AR/AL)
03. Video Bandwidth : 80MHz, Composite Video
04. Audio Bandwidth : 30MHz, Stereo Audio (AR/AL)
05. Support HDTV Resolution for 480i, 480p, 576p, 720p
06. Scan Rates Accepted for 50Hz or 60Hz
07. Signals amplifier including: Composite Video and Stereo Audio
08. Support Lower power consumed full load under 150 mA
09. Power supply offer a universal type 100~240 VAC switch

SPECIFICATIONS

Type of switcher	1 input to 4 outputs AV Distribution Amplifier
Type of Signals	Composite Video, Stereo Audio (AR/AL)
Video Bandwidth	80MHz, (-3dB) 2V p-p
Audio Bandwidth	30MHz
Audio Frequency Respond	20Hz ~ 20KHz
Video Boost	about 100M distance
Scan Rates Accepted	50Hz or 60Hz
Safety Approvals	CE, FCC, VCCI, REACH, WEEE
Dimension (WxDxH)	5.11" x 3.70" x 1.57" (130mm x 94mm x 40mm)
Weight	0.3 kg / 0.66 lb
Power Supply	DC 12V, @0.3A (World Wide Universal AC 100~240V 50/60Hz)