

## SB-2833


HDMI · DVI To VGA · Digital · Audio Converter



Input : 1x HDMI, 1x DVI  
Output : 1x VGA, 1x Stereo Audio (AR/AL), 1x Digital Audio



### DIAGRAM TYPICAL

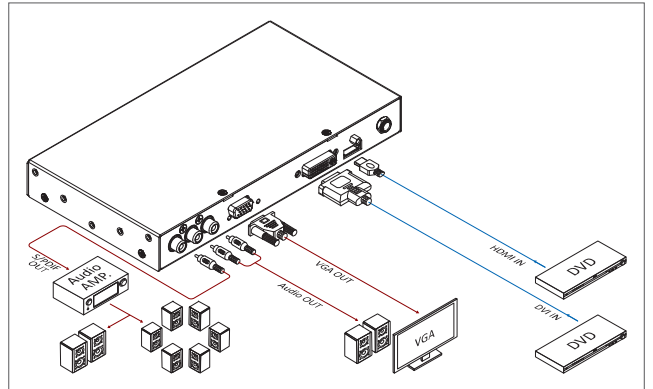

### FEATURES

- Support HDMI/DVI Digital Audio Video to Analog VGA Converter
- Inputs : 1x HDMI (Digital Video/Audio) & 1x DVI (Digital Video)  
Outputs: 1xVGA+Stereo Audio & 1x Digital Audio(PCM)
- Automatic detecting video of 480P,720P and 1080i/p from HDMI and DVI input
- Direct HDMI & DVI input selection by buttons on front panel
- VGA Output resolution selections :  
SVGA (800x600), XGA (1024x768), SXGA (1280x1024),  
WSXGA (1366x768), WXGA (1440x900), WSXGA+ (1680x1050),  
UGA (1600x1200), WUXGA (1920 x 1200)
- Support Digital Audio (PCM) and Stereo Audio outputs

### SPECIFICATIONS

Video / Audio Input Signals	HDMI : Digital Video, Digital Audio (PCM), 1x HDMI connector DVI : Digital Video, 1x DVI connector
Video / Audio Outputs	VGA (RGBHV) : 1x via HD-15 Female connector Digital Audio (PCM) : 1x via RCA connector Stereo Audio : 2x via RCA Connectors
Video Bandwidth	350MHz, (-3dB), Audio Bandwidth : 50MHz, (-3dB)
Audio Frequency Respond	Audio Frequency Respond : 20Hz~20KHz
Safety Approvals	CE, FCC
Dimension (WxDxH)	6.88" x 3.14" x 0.98" (175mm x 80mm x 25mm)
Weight	0.7 kg / 1.54 lb
Power Supply	DC 12V, @1A (World Wide Universal AC 100~240V 50/60Hz)

## SB-2835


VGA To HDMI Converter



Input : 1x VGA, 1x Stereo Audio (AR/AL)  
Output : 1x HDMI, 1x Digital Audio



### DIAGRAM TYPICAL

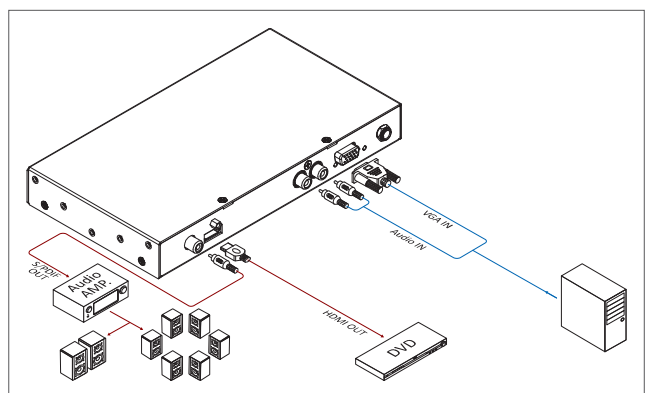

### FEATURES

- VGA to HDMI Converter
- Inputs : 1x VGA (RGBHV) & 1x Stereo Audio (AR/AL)  
Outputs : Video : 1x HDMI (Digital Video + Digital Audio)  
Audio : 1x Digital Audio (PCM)
- Automatically detects for VGA, SVGA, XGA signal
- Highest input resolution is SXGA (1280x1024)
- Output automatically scan HDMI resolution of 480p, 720p or 1080i/p
- Support HDMI version 1.3 with HDCP Compliant
- Support audio (PCM) outputs

### SPECIFICATIONS

Video / Audio Input Signals	VGA (RGBHV) 1x HD-15p Female Connector Stereo Audio (AR/AL) 2x via RCA Connectors
Video / Audio outputs Signals	HDMI, 1x HDMI connector Digital Audio (PCM) 1x via RCA connector
Video Bandwidth	450MHz, (-3dB), Audio Bandwidth : 50MHz, (-3dB)
Audio Frequency Respond	20Hz~20KHz
Safety Approvals	CE, FCC
Dimension (WxDxH)	6.88" x 3.14" x 0.98" (175mm x 80mm x 25mm)
Weight	0.7 kg / 1.54 lb
Power Supply	DC 12V, @1A (World Wide Universal AC 100~240V 50/60Hz)