

SB-2829


Component To VGA Converter

VGA COMPONENT CONVERTER

Input : 1x Component Video, 1x Stereo Audio (AR/AL)
Output : 1x VGA, 1x Stereo Audio (AR/AL)



DIAGRAM TYPICAL

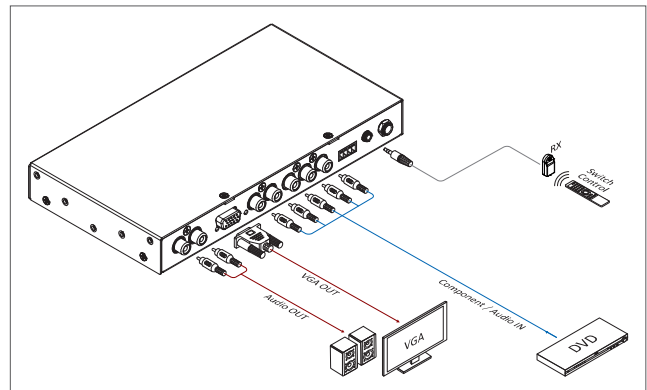

02

FEATURES

- Support Component Video to VGA Converter
- Inputs Video : 1x Component Video (YpBPr)
Audio : 1x Stereo Audio (AR/AL)
Outputs Video : 1x VGA (RGBHV)
Audio : 1x Stereo Audio (AR/AL)
- Automatic detection HDTV Component Video Standards 480p, 720p AND, 1080i/p Resolution system
- Automatically control Down Scaling and Up Scaling for Video in/out
- Direct Output VGA Resolution VGA, SVGA, XGA, SXGA, WXGA, WSXGA+, WUXGA Selections

SPECIFICATIONS

Input Signals	Video : Component Video(YpBPr) 3x via RCA Connectors Audio : Stereo Audio(AR/AL) 2x via RCA Connectors
Outputs Signals	Video : VGA(RGBHV) 1x via HD-15P connector Audio : Stereo Audio via 2x RCA connectors
Output Selections	Direct VGA Resolution Output Selections
Video bandwidth	350MHz, (-3dB)
Audio Bandwidth	50MHz, (-3dB)
Audio Frequency Respond	20Hz~20KHz
Safety Approvals	CE, FCC
Dimension (WxDxH)	6.88" x 3.14" x 0.98" (175mm x 80mm x 25mm)
Weight	0.7 kg / 1.54 lb
Power Supply	DC 12V, @1A (World Wide Universal AC 100~240V 50/60Hz)

SB-2834


Video · S-Video To Component Converter

VIDEO S-VIDEO COMPONENT CONVERTER

Input : 1x S-Video, 1x Composite Video, 1x Stereo Audio (AR/AL)
Output : 1x Component Video, 1x Stereo Audio (AR/AL)



DIAGRAM TYPICAL

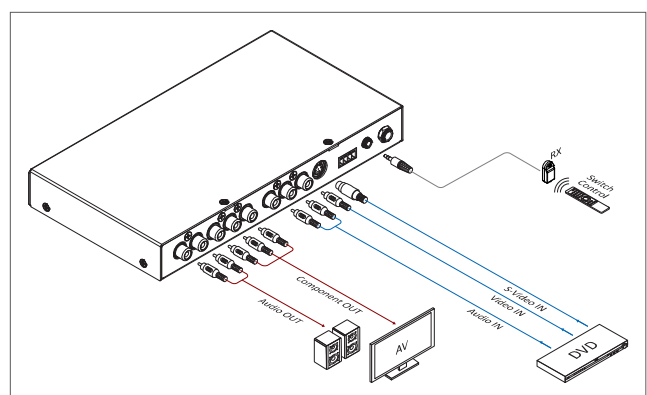

FEATURES

- Support CVB S/ SV to Component Video Converter
- Inputs Video : 1x Composite Video & 1x S-Video (Y/C)
Audio : 1x Stereo Audio (AR/AL)
Outputs Video : 1x Component Video (YpBPr)
Audio : 1x Digital Audio (PCM), 1x Stereo Audio (AR/AL)
- Automatic detection TV Standards system NT SC-M3.58, NT SC-JEia, PAL, PAL-N, PAL-60, PAL-M input system
- Automatic control UP and Down Screen when Video or S-Video in/out
- Direct Selection the Component Video 480p / 720p / 1080p Resolutions output
- Support 5% of overscan range of HDTV Screen output
- Support Screen up/ down and adjusted

SPECIFICATIONS

Input Signals	Video : Composite Video 1x RCA & 1x S-Video(Y/C) & 1x 4p Mini -Din Connector Audio : Stereo Audio(AR/AL) 2x RCA & Digital Audio via 1x RCA Connector
Outputs Signals	Video : Component Video (YpBPr) via 3x RCA connectors Audio : Stereo Audio (AR/AL) 2x RCA Connectors
Output Selection	Direct Component Video Resolution and Frequency 50/60Hz Output Selections
Video Bandwidth	200 MHz, (-3dB)
Audio Frequency Respond	50 MHz, (-3dB)
Audio Bandwidth	20 Hz~ 20 KHz
Safety Approvals	CE, FCC
Dimension (WxDxH)	6.88" x 3.14" x 0.98" (175mm x 80mm x 25mm)
Weight	0.7 kg / 1.54 lb
Power Supply	DC 12V, @1A (World Wide Universal AC 100~240V 50/60Hz)